



# 48" MIRACLEAN® ELECTRIC GRIDDLE

*"Serving Those Who Serve The Very Best"®*



- 100% customer satisfaction
- Saves 44% in clean up
- Cooler kitchen
- Low temperature cooking high heat transfer reducing shrinkage
- Saves 32% in energy costs
- Reduced flavor transfer
- Zoned temperature control
- Many options available



*\*Stand with casters or 4" legs are optional*

The Keating MIRACLEAN® Griddle is designed to provide maximum performance with many benefits to the operator. The mirror surface of the MIRACLEAN® is achieved in a special eight step process. Insulated stainless steel electric elements are mounted every 12" to ensure performance and recovery and allows the operator to use zone cooking for different products.

### SAVES ON ENERGY COSTS

Documented energy savings of 32% by an independent testing lab means dollar savings of up to \$400 per year in energy costs on a 3-ft. model. The MIRACLEAN® surface also reduces radiated heat loss to less than 10% of a conventional steel plate griddle. By keeping heat on the surface and out of the kitchen, the MIRACLEAN® Griddle reduces air conditioning demands and gives the chef a cooler cooking environment.

### REDUCES FLAVOR TRANSFER

The smooth surface of the MIRACLEAN® prevents food particles from being trapped as they are in steel plate griddles. The surface virtually eliminates flavor transfer.

### SAVES 44% IN CLEAN UP

A documented study conducted by the University of Illinois General Engineering department confirmed what has long been known by MIRACLEAN® operators that cleaning the MIRACLEAN® saves time! 44% savings means less labor cost and higher productivity. Cleaning just a three foot MIRACLEAN® versus a conventional steel plate model three times daily would mean savings of \$2,600 over the life of the unit! Cleaning a MIRACLEAN® surface takes just three easy steps: scraping with the Keating Scraper, wash with a Keating Palmetto brush and water, and using Keating Klenzer and a damp cloth to polish. No more griddle bricks, grill screens or harsh chemicals are needed, and reseasoning the plate is not necessary.

### ACCURATE TEMPERATURE CONTROL

MIRACLEAN® Griddles feature zoned temperature control to ensure temperature accuracy in cooking. The MIRACLEAN® surface allows the operator to cook at lower temperatures to control the degree of caramelization and product shrinkage.



48" WIDE MIRACLEAN® ELECTRIC GRIDDLE

**DESCRIPTION**

The Keating MIRACLEAN® Griddle consists of a griddle plate, having a drain trough and perimeter installed in a cabinet, equipped with electric elements. An automatic temperature control mechanism is arranged and designed for the proper cooking of food on a griddle surface.

**SPECIFICATIONS**

**Griddle Plate** to be made of high carbon, 3/4" steel plate upon which a trivalent chromium surface has been applied in a special eight step process to ensure a mirror smooth surface. The MIRACLEAN® plate has an emissivity rating of .078.

**Drain Trough** 48x24 and 48x30 to be 3" on the left side and 2" across the front with a 4" x 1 1/2" drain in the left front (48x30FT and 48x36FT have front trough only). The drain is located above a large stainless steel grease drawer with baffles and a rear handle. The perimeter and grease trough are 14 gauge stainless steel. The perimeter is 4 1/2" high across the back with sides angling from 4 1/2" in the rear to 1/2" at the front. Sides and rear perimeter have an exterior trim of 22 gauge stainless steel.

**Electric Elements** to be stainless steel with one element for every 12" of linear plate surface. Each element is encased in insulation and held tightly in place with a molded steel cover.

High input elements are available.

**Cabinet** to have an inner liner of 20 gauge aluminized steel. Outer cabinet of 14 gauge stainless steel sides, 18 gauge stainless steel back and 16 gauge aluminized steel bottom. A stainless steel flue deflector is shipped with every unit.

**Thermostat** to be close range, hydraulic type, accurate to ± 5° from 250° to 550°F. Application of this thermostat is patented by Keating.




**Standard Accessories** to include Keating razor scraper with a packet of 10 blades, 4" wide spatula, long-handle palmetto brush, egg turner, can of Keating Klenzer.

**Electric Specifications** to have 3 wire terminal block with ground for field wiring. (See local codes for supply line requirements).

**Special Order Options** may include 4" legs, stand, stand with shelf and casters, cutting board: stainless, richlite, plate shelf, thermostat knob guard, belly bar, streaked surface, custom griddle styles and configurations, high input elements (30" only), security package.

Model	kW	Amps @ 208V		kW	Amps @ 220V		kW	Amps @ 240V		kW	Amps @ 480V		T-Stats
		3Ø	1Ø		3Ø	1Ø		3Ø	1Ø		3Ø	1Ø	
48x24	8.2	26-26-17	40	9.2	28-28-10	42	10.9	30-30-20	46	9.2	13-13-8	4	
48x30	10.7	34-34-22	51	12.0	36-36-24	55	14.3	39-39-26	60	14.3	20-20-13	4	
48x30 FT	10.7	34-34-22	51	12.0	36-36-24	55	14.3	39-39-26	60	14.3	20-20-13	4	
48x36 FT	13.4	43-43-28	64	15.0	45-45-30	68	17.9	49-49-32	75	17.9	25-25-16	4	
48x30 HI	15.6	50-50-33	75	17.5	53-53-34	80	20.8	57-57-38	87	20.8	29-29-19	4	

FT = Front Trough only.

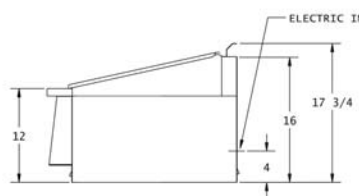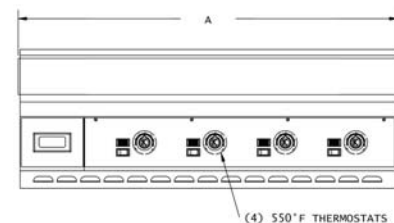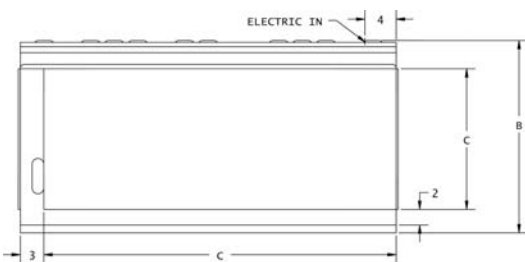

MODEL	(A) WIDTH	(B) DEPTH	HEIGHT	(C) PLATE SIZE	SHIP WT.
48x24	48 1/2"	24 5/8"	17 3/4"	45"Wx18"D	485 lbs.
48x30	48 1/2"	30 5/8"	17 3/4"	45"Wx24"D	485 lbs.
48x30 FT	48 1/2"	30 5/8"	17 3/4"	48"Wx24"D	485 lbs.
48x36 FT	48 1/2"	36 5/8"	17 3/4"	48"Wx30"D	600 lbs.



**NOT FOR OUTDOOR INSTALLATION  
NOT FOR DOMESTIC INSTALLATION**

*As continuous product improvement occurs, specifications may be changed without notice.*

KEATING OF CHICAGO, INC.  
Toll Free 1-800-KEATING  
www.keatingofchicago.com