

"Serving Those Who Serve The Very Best"®

- **Reduces cooking time by up to 60%**
- **Two-sided cooking with precise temperature control**
- **Reduces space requirements**
- **Infinite height adjustment**
- **Replaceable non-stick cooking sheet makes clean up easy**
- **Mounted onto gas or electric MIRACLEAN® griddle**
- **Exclusive MIRACLEAN® surface reduces heat emissions**
- **Auto Lift heads optional**


The Top-Side™ Cooker is ideal for high volume or limited kitchen space operations that require large quantities of food products to be cooked fast without sacrificing product quality. Mounted onto a MIRACLEAN® griddle, Keating's Top-Side™ Cooker is designed to provide the best in speed and consistency that two-sided cooking offers.

REDUCES COOKING TIME

The Top-Side™ Cooker dramatically reduces cooking time by up to 60% thus increasing production. Each cooking head covers a griddle surface of 10 1/2"x20"—an area large enough to cook eight quarter pound hamburger patties at once. With the 4KW rated element at 220V input, the Top-Side™ Cooker ensures high speed cooking production.

PRECISE COOKING

The Top-Side™ Cooker allows infinite height adjustment for perfect and consistent cooking results. The cooking head can be easily adjusted to a desired height up to 1 1/2" above the griddle plate.

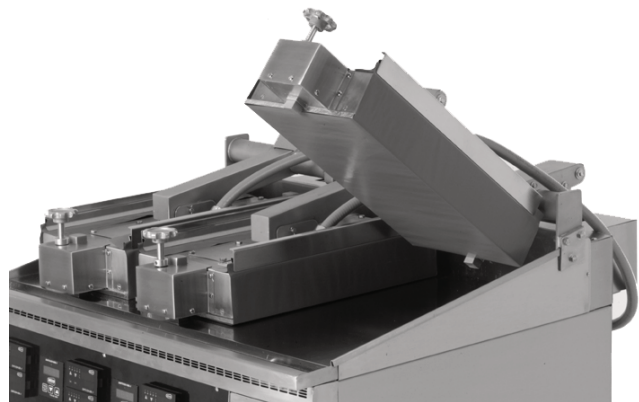

NON-STICK COOKING SHEETS

Unlike competitive designs that require expensive and time consuming platen change outs when worn, each Keating Top-Side™ Cooker comes with a proprietary designed USDA approved, low cost reversible cooking sheet made of a polymer coated material that is easily replaceable when worn. To clean the surface, simply wipe down with a damp cloth.

ACCURATE TEMPERATURE CONTROL

An electronic thermostat is built into the Top-Side™ Cooker head for accurate and even heat distribution. Each Top-Side™ Cooker has a free standing control panel. The Top-Side™ Cooker can be installed onto any 24" to 72" wide and 30" deep gas or electric Keating MIRACLEAN® griddle.

DESCRIPTION

The Keating Top-Side™ Cooker consists of a cooking platen with an electrical control, electrical element, proprietary USDA approved removable cooking sheet and a cool touch handle. The Top-Side™ Cooker has a mounting assembly which attaches to an electric or gas Keating MIRACLEAN® griddle with a 30" deep plate. An electronic thermostat, auto-safety shut off control and two indicating lights ensure fast and efficient cooking. The Top-Side™ Cooker is designed to be mounted directly over each thermostat in the MIRACLEAN® plate.

SPECIFICATIONS

Platen to be 10 1/2" wide by 20" deep. Platen to be made of a 3/8" high carbon steel plate with the MIRACLEAN® trivalent chromium surface applied.

Mounting Assembly to be attached to the rear of the MIRACLEAN® griddle and to be designed to support Top-Side™ Cooker heads. Assembly shall add 3 3/4" to depth of griddle. Number of cooking heads to be installed must be specified.

Housing to be made of easy to clean and highly polished 18 gauge stainless steel and to mount to any new MIRACLEAN® griddle that is 30" deep. Cooking heads shall be mounted every 12 inches up to a maximum of six heads on a 72" wide griddle.

Cooking Sheet to be made of a proprietary USDA and UL Listed polymer non-stick material. The reversible and removable cooking sheet is to be easily changeable using a removable clip on each side of the cooking platen.

Cooking Height Adjustment to be manually set using the Micro Leveler that allows cooking heights above the food up to 1 1/2". The infinite adjustment provides consistent cooking results.


Standard Accessories to include one cooking sheet.

Electrical Specifications to be 4.8 kW and 20 Amps single phase at 240 VAC. Element is to be embedded in an aluminum casting to ensure even heat distribution to the platen. Each electrical control shall contain an electronic thermostat accurate to ±5°F from 0°F to 500°F, an ON/OFF switch and "power on" and "ready to cook" indicating lights. Each electrical control panel is to be connected to its cooking arm with a 4' coated electrical conduit and is to be equipped with a 9' neoprene covered 12-gauge 3-wire cord for connecting to its own 208-240 volt single phase supply. No plug shall be provided.


Special Order Options may include extra cooking sheets, streaked heads and auto lift heads.

Model No. and Description	KW 240V	AMPS 240V	No. of T-stats	Width (A)	Depth (B)	Ship WT.
Top-Side™ Cooking Head 208-240/1	4.8	20	1	10 1/2"	20"	50 lbs.
Top-Side™ Mounting Assembly*						
Up to 36" wide				37"	34 5/8"	70 lbs.
Up to 48" wide				49"	34 5/8"	90 lbs.
Up to 60" wide				61"	34 5/8"	110 lbs.
Up to 72" wide				73"	34 5/8"	120 lbs.


*Top-Side™ Mounting Assembly is required for Top-Side™ Cooker installation. Mounting Assembly will add 3-3/4" in depth to the rear of the griddle.

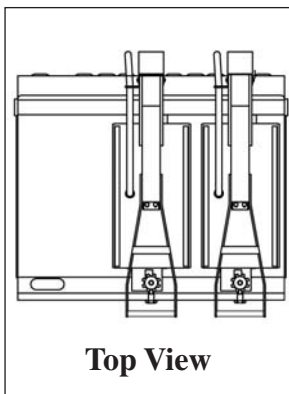

Top View

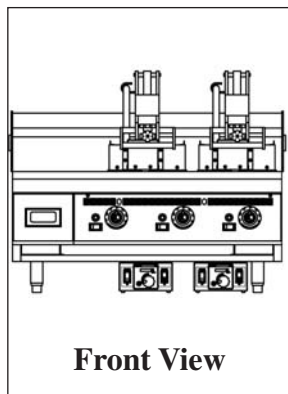

Front View

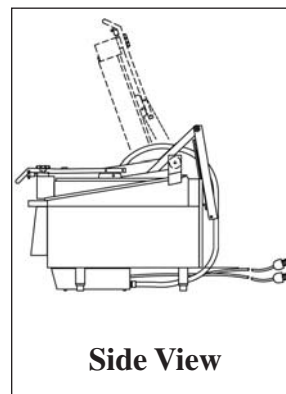

Side View



**NOT FOR OUTDOOR INSTALLATION
NOT FOR DOMESTIC INSTALLATION**

As continuous product improvement occurs, specifications may be changed without notice.

KEATING OF CHICAGO, INC.
Toll Free 1-800-KEATING
www.keatingofchicago.com