

SERVICE INSTRUCTIONS

1-800-KEATING • keatingofchicago.com


REPLACEMENT OF PASTA GAS MODELS PLUS THERMOSTAT

Removal and Replacement of Thermostat

The Keating Thermostat controls the temperature of the Pasta Plus within a preselected range for the purpose of cooking food products.

Removal:

- 1. Disconnect electric power source.
- Turn off gas.
- 3. Drain water from Pasta Plus vessel.
- 4. Remove burners.
- 5. Remove thermostat knob by carefully pulling it straight out from control panel.
- 6. Remove dial plate by removing three screws and pulling it from control panel.
- 7. Remove control panel.
- 8. Remove two screws which hold thermostat body to control panel.
- 9. Detach the two wires from thermostat body, carefully noting connections.
- 10. Unwind excess capillary from control panel back.
- 11. Remove control panel back 14 model.
- 12. Loosen compression fitting over thermostat bulb.
- 13. Remove thermostat bulb from Pasta Plus vessel.

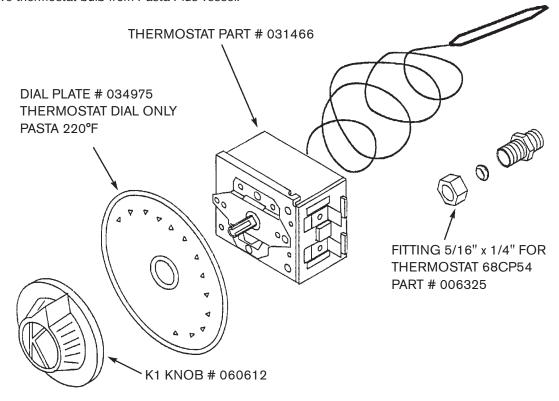



SERVICE INSTRUCTIONS

1-800-KEATING • keatingofchicago.com

REPLACEMENT OF PASTA GAS MODELS PLUS THERMOSTAT

Replacement:

- 1. Set compression fitting on cap end of bulb finger tight, 1/2" from the capillary end of the bulb.
- 2. Insert new thermostat bulb through control panel back.
- 3. Apply water resistant flexible sealant on Pasta Plus vessel threads before installing bulb into Pasta Plus vessel.
- 4. Finger tighten the compression fitting a minimum of 3/8" to 1/2" of the bulb must stick out of the Pasta Plus vessel to allow the compression fitting to seal.
- 5. Tighten the compression fitting.
- 6. Replace the control panel back 14 model.
- 7. Slide fabric sleeve over capillary. Avoid crimping.
- 8. Reconnect the two wires on the thermostat body.
- 9. Replace the two screws which hold the thermostat body to control panel.
- 10. Replace control panel. Avoid crimping wires.
- 11. Replace the three retaining screws and washers which hold dial plate in place.
- 12. Replace the thermostat knob.
- 13. Replace burners.
- 14. Refill Pasta Plus with water to proper level. See section III of service manual.
- 15. Connect electric power source, turn on gas and pilots. See section III of service manual.
- 16. Start and pre-heat Pasta Plus, and calibrate thermostats. See sections III and IV of service manual.