




SERVICE INSTRUCTIONS

1-800-KEATING • keatingofchicago.com

TOP-SIDE™ COOKER TROUBLE SHOOTING

Resistance Chart for Thermostat Probe

Temperature (F°)	Resistance (Ohm)
95	0.30
100	3.80
125	4.60
150	5.50
175	6.40
200	7.90
225	8.40
250	9.70
275	10.90
300	12.40
325	13.80
350	15.10
375	17.00
400	18.40
425	20.20
450	21.30
475	23.30

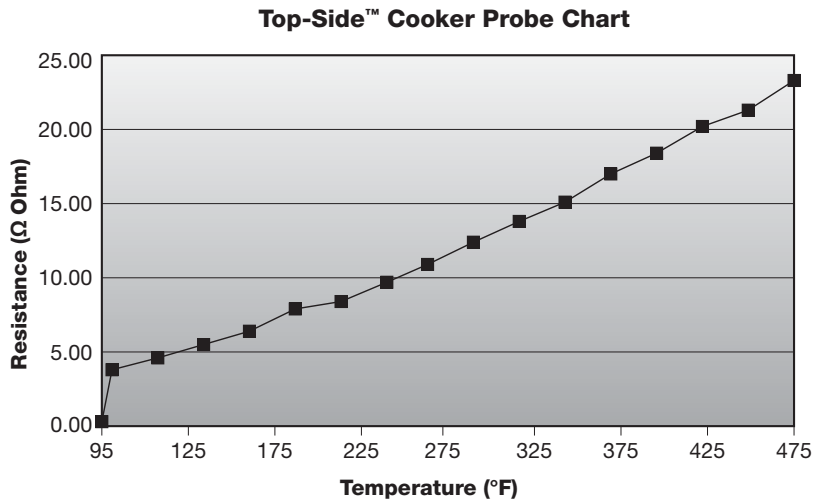

1. If resistance is over 15%, the probe must be replaced (part# 016671).
2. Before and during replacement, ensure the connections to the probe are extremely tight.

Instructions for Removing Thermostat Probe:

- Remove lifting assembly by removing 2 pins (A).
- Remove channel for lifting assembly by removing 4 bolts (B).
- Remove thermostat probe by pressing down & rotating counterclockwise.
- Install new thermostat probe. **NOTE:** Conductive heat paste should be used on the thermostat probe prior to installing.
- Connect new probe wires to existing wires. Ensure wire connections are tight.
- Reassemble part 'B', then 'A' and test.

